

Centralized Radio Tuning for Flight Deck Upgrades  
High-Res, Color LCD Display

# RCU

## Radio Control Unit

Approved for Fixed Wing and Helicopter Installations  
Up to Six FMS Suggested Frequencies/Identifiers  
18 Pilot-Selectable Preset Frequencies



## Add Sophistication and Flexibility to Aircraft Radio Control and Tuning Operations

Universal Avionics' Radio Control Unit (RCU) provides a centralized, easy-to-use control interface, with radio tuning and mode control function. Consolidating multiple radio control heads into a single, advanced controller provides savings in space and weight, while increasing efficiency and adding sophisticated radio tuning capabilities to your flight deck.

Bezel-mounted controls provide quick and simple tuning of manual, pre-stored, standby, previous, next, and suggested frequencies/ identifiers. Eighteen pilot-selectable preset frequencies can be accommodated for NAV, COM and ADF radios. Conveniently tune any onside or offside COM, NAV and ADF radios as needed. The RCU also includes a unique guarded-keyed emergency function which automatically sets the preset frequencies for the COM radio and transponder to 121.500 MHz and Code 7700 respectively. The option to enter an eight or ten character flight ID is available.

The RCU seamlessly integrates with Universal Avionics' Flight Management Systems (FMS), or can be integrated into your flight deck as a stand-alone

radio tuning device. When interfaced to the FMS, the FMS functions as a backup tuning source, and provides the RCU with up to six suggested frequencies based on the active flight plan (VHF COM, NAV and ADF radios), reducing pilot workload.

The RCU features a high-resolution, color LCD display. An LED backlighting feature adds higher reliability and lower power consumption, reducing heat in the cockpit.

To support special missions operators, a Night Vision Goggle (NVG)-compatible variant is also available.

**UNIVERSAL™ AVIONICS**  
an **Elbit Systems** Company


# Radio Interfaces

- VHF Comm (CSDB or ARINC 429)
- VHF NAV (CSDB or ARINC 429)
- DME (CSDB or ARINC 429)
- ADF (CSDB or ARINC 429)
- Transponder (CSDB or ARINC 429)
- TCAS (ARINC 429)
- HF (ARINC 429)
- TACAN (ARINC 429)

## Specifications



### Hardware

Bezel Size: 3.74 in. H x 5.74 in. W  
 Depth: 7.06 in. (back of bezel to rear of connector)  
 Weight: 5.1 lbs.  
 Mounting: Dzus  
 Faceplate Color: Gray or Black  
 Display: Active Matrix Color LCD  
 Display Size: 2.12 in. H x 4.05 in. W | 4.57 in. Diagonal  
 Viewing Angle: +60/-60 deg. Horizontal, +35/-10 deg. Vertical  
 Resolution: 264 x 504 Pixels, 124.5 color groups per inch (CGPI)  
 Night Vision: Model available

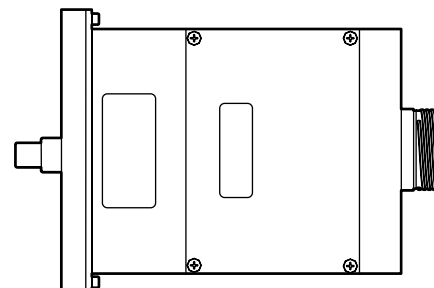

### Bezel Controls

Frequency Tuning Selector Knob (8.33 kHz and 25 kHz frequency spacing selection)  
 8 Line select keys  
 Active  
 Previous  
 Next  
 Top  
 PreSet  
 Cross Tune  
 DME Hold  
 Detail  
 Ident  
 Bright/Dim  
 Emergency (Guarded keys automatically load presets for COMM to 121.500 and Transponder to Code 7700)

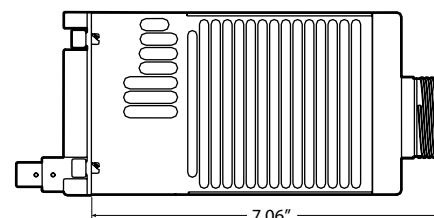

### Inputs/Outputs

ARINC 429  
 CSDB  
 Discretes

### Cooling

Integral fans; cold wall construction

### Power

Primary Input: 28 VDC standard  
 Lighting: 5V or 28V  
 Consumption: 36 Watts

### FAA TSO/ETSO

C113 Airborne Multipurpose Displays

### RTCA Documents

Hardware: DO-160D  
 Software: DO-178B, Level C

## UNIVERSAL™ AVIONICS

an Elbit Systems Company

### Corporate Offices

3260 E. Universal Way  
 Tucson, Arizona 85756 USA  
 +1 520 295 2300 / 800 321 5253  
 Fax: +1 520 295 2395

### Internet

uasc.com  
 E-mail: info@uasc.com

Features and capabilities are representative of systems at time of printing.  
 Please contact your Universal Avionics sales representative for the latest system enhancements.  
 Specifications contained herein are subject to change without notice.



UASC-7-17  
 07-26-2018